


DSS-2010M

Feel the Digital Power!



Wall Installation

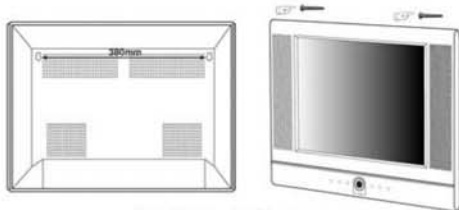

| | | |
|--------------------------|---|---|
| SYSTEM | NTSC | |
| | NTSC-4.43 | |
| POWER | AC/DC Adaptor 12V (100-240V, 50/60Hz) | |
| | Power Consumption | 70W |
| | ST-BY Power Consumption | Below 3W |
| TUNING | FS 181 Program | |
| | Auto/Manual Programming | |
| | Digital Comb Filter | |
| VIDEO | Progressive Scan | |
| | PSM(Dynamic, Standard, Mild, Game, User) | 5MODE |
| SOUND | Stereo | |
| | AVL(Auto Volume Leveller) | |
| OSD | Sound Output(RMS) | 3W(Max 5W)x2 |
| | Half-tone OSD | |
| External Connections | MENU | |
| | Multi Language OSD | |
| User Convenient FEATURES | AV IN | |
| | AV OUT | |
| | S-VIDEO IN | |
| | Component IN | |
| | Headphone Output | |
| LCD PANEL | Resolution | VGA 640 x 480 |
| | Type | Color Active Matrix Liquid Crystal Display |
| | Size | LG-Philips LCD 20.1"(510mm) |
| | Display Type | RGB stripes |
| | Pixel Format | 640 horiz. By 480 vert. Pixels |
| | Pixel Pitch | 0.6375 mm x 0.6375 mm |
| | Color Depth | 16,777,216 colors, 8bits |
| | Surface | Hard coating(3H), Anti-glare |
| | Back Light | 4CCFL |
| | Viewing Angle | H: 140° V: 120° |
| Optical | Luminance | 400 cd/m ² (Typ.) at five points average 450 cd/m ² (Typ.) at center one point |
| | Contrast Ratio | 400:1 |
| Main body | Dimension | Horizontal size: 22.83" / Thickness: 3.15" Height: 19.84" / Weight: 25.24 lb |


LCD ■■■■■ 20.1"



Control Panel



Desktop Installation



Input Panel