

General Specifications

ELECTRICAL

Input Voltage	24 Volt AC - (WDBAC SERIES) 12 Volt DC - (WDB SERIES)
Power Consumption	200mA or less
Video Connector	BNC
Power Connector	Bare leads (WDBAC SERIES) 2.1 Barrel Plug - Center Pos. (WDB SERIES)

VIDEO



Pixels	High Resolution - 768(H) x 494(V) Normal Resolution - 512(H) x 492(V)
S/N Ratio	More than 48dB
Video Output	1.0Vp-p 75ohm
CCD	1/3" Color DSP and 1/3" Monochrome
Auto Iris	Level Control Adjustment
Back Light (BLC)	On

PHYSICAL

Construction	Cast Aluminum Housing with Clear Window
Hardware	Tamper-proof screws / L-wrench
Color	Black (Beige Available)
Lens	4 - 9mm Vari-Focal Auto-Iris Lens
Dimensions	2.09" (53mm) DIA. x 3.11" (79mm) L 2.09" (53mm) DIA. x 4.31" (109mm) L

ENVIRONMENT

Operating Temp.	-4 Deg. F to +158 Deg. F
Storage Temp.	-20 Deg. F to + 160 Deg. F
NEMA Rating	NEMA 4 - Weatherproof

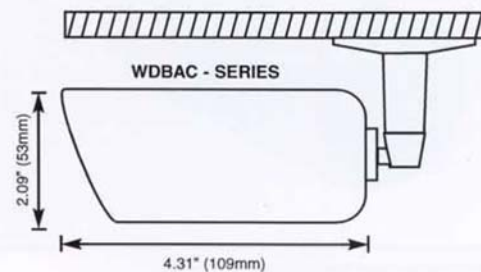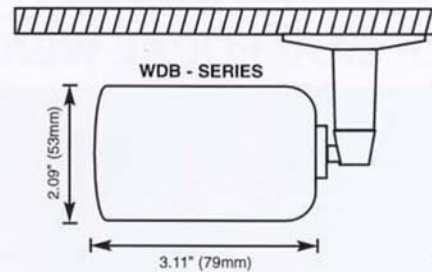

THESE BULLET CAMERAS ARE DESIGNED TO BE MOUNTED FROM THE TOP, BOTTOM OR REAR OF THE CAMERA HOUSING

COLOR	CCD	POWER REQ.	RESOLUTION	LUX	LENS
DSSAC-3580C	1/3" COLOR DSP	24 Volt AC	420 TV Lines	0.3	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)
DSSAC-3585C	1/3" COLOR DSP	24 Volt AC	570 TV Lines	0.3	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)
DSS-3580C	1/3" COLOR DSP	12 Volt DC	420 TV Lines	0.3	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)
DSS 3858C	1/3" COLOR DSP	12 Volt DC	570 TV Lines	0.3	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)

B&W	CCD	POWER REQ.	RESOLUTION	LUX	LENS
DSSAC-3580B	1/3" B&W	24 Volt AC	430 TV Lines	0.03	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)
DSSAC-3585B	1/3" B&W	24 Volt AC	570 TV Lines	0.03	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)
DSS-3580B	1/3" B&W	12 Volt DC	430 TV Lines	0.03	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)
DSS-3585B	1/3" B&W	12 Volt DC	570 TV Lines	0.03	4 - 9 VARI-FOCAL AUTO IRIS (F 1.2)