

## **Mini Speed Dome Camera**



**WDS-1010P**


### **MAIN FEATURES**

- The world smallest Mini Speed Dome Outdoor
- Built-in 10x Auto Focus Optical Zoom (Digital 10x)
- 1/4" Interline Transfer CCD
- Day&Night(ICR),0.7 Lux with ICR ON
- Horizontal Resolution 500TVL(Min.)
- Multi Protocol & Baud Rate Support.(Pelco-D/Pelco-P/ STD.)
- Programmable User Preferences (Preset, Tour, Scan,etc,)
- Vector Scan & Diagonal Scan during Auto Tour.
- CE, FCC, VCCI, RoHS Compliance.
- IP67 (Water proof) / Vandal Proof (Built-in Fan & Heater)

**WELDEX CAN CUSTOMIZE CAMERA FOR YOUR SPECIFIC NEED!!**

# WDS-1010P (Mini Speed Dome Camera)

## DIMENSIONS

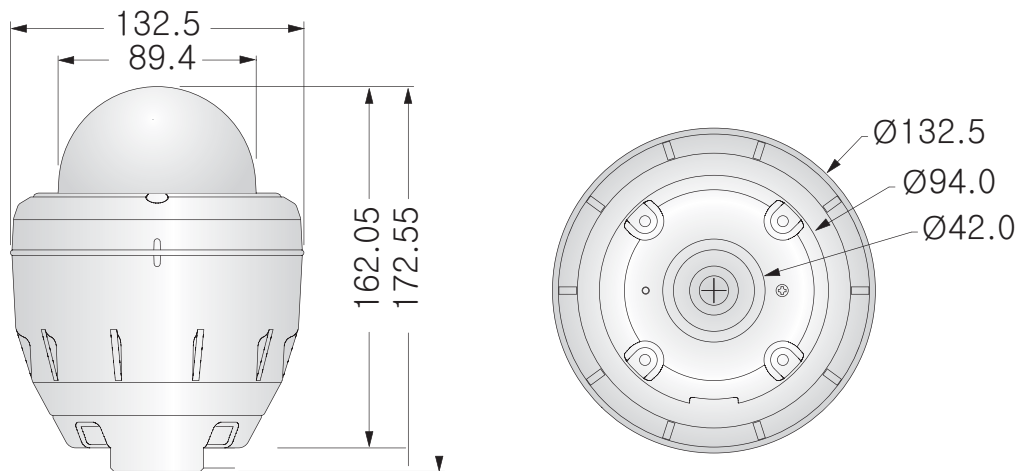

SPECIFICATIONS		
Camera	NTSC	PAL
Image Device	1/4" Interline Transfer CCD	
Lens	10x, f=3.8 to 38.0mm(F2.8)	
Min Focus Distance	1,000mm	
Sync. System	2:1 Interline	
S/N Ratio	50dB (AGC Off, Weight On)	
Total Pixel	410K	470K
Effective Pixel	768(H) x 494(V)	752(H) x 582(V)
Day & Night	Auto1, Auto2, COLOR, B/W (ICR)	
Horizontal Resolution	Color : 500TV Lines (Wide end.)	B/W : 570TV Lines (Wide end.)
Minimum Illumination	Color : 0.7Lux/F=2.8 (50 IRE)	B/W : 0.02Lux/F=2.8 (50IRE)
Video Output Signal	CVBS : 1.0 Vp-p/75 ohm	
Control Method	RS-485 or RS-232 (9600bps, 19200bps, 38400bps Selectable)	
WDR(Wide Dynamic Range)	-----	
White balance	ATW / AWC / Manual (1800°K ~10,500°K)	
<b>Dome</b>		
Panning Range & Speed	0° ~360° /Max 360°/sec	
Panning Range & Speed	-2° ~90° / Max 90°/sec	
Preset Speed	Max 400°	
Preset Position	1~240 Positions	
Group Tour	1~8 Group Tour	
Pattern	1~8 Pattern (120 sec Memory)	
Auto Scan	1~8 Scan (Programmable Speed & Diagonal Scan)	
Flip	Auto Flip (On/Off)	
Privacy Zone Masking	6 Privacy Zones (4 Group) Total 24 Privacy Zones	
Alarm	4 Inputs/1 Output	
Protocol	RS-485,422 Baud rate 9600bps(STD.)(Opt. : 38400, 4800, 2400)	
Camera ID	1~99	
OSD	Dome ID, Pan/Tilt Angle Range. Mode...	
<b>Environmental</b>		
Operating Temperature	-4°F ~ 158°F (-20°C ~70°C)	
Operating Humidity	Up to 90% RH	
Storage Temperature	-4°F ~ 158°F (-20°C ~70°C)	
Built-in Fan & Heater	Built-in Fan & Heater	
Heater Operate	24.8°F	
<b>General</b>		
Certifications	CE, FCC, RoHS, IP67	
IP Rating	IP67 (waterproof)	
Power Supply	DC24V , 750mA	
Dimensions	132.5 x 162.05mm (3.5" Bubble)	
Weight	Approx. 1400g	

# WDS-1010P (Mini Speed Dome Camera)

## OPTIONAL BRACKET



(WD-500MOC)  
Ceiling Mount Bracket



(WD-500MOW)  
Wall Mount Bracket



(WD-500MOS)  
Surface Mount Bracket



(WD-500SH)  
Sunshield Bracket

